

# Superreel® - Industrial Reel

## AHSH680D SERIES



## FEATURES

- Standard frame and spool assembly are of heavy duty steel construction. Also available in aluminum or stainless steel.
- High pressure. Heavy duty. Full flow shaft and swivel.
- Rugged construction: Steel drum and all bolted construction.
- Dimensional flexibility: Specify height, width and depth dimensions to fit your space requirement.
- Low maintenance: Dual main bearings never need lubrication.
- Shipped completely assembled, ready to install.

1




**WWW.SUPERREEL.COM**

Email: [sales@superreel.com](mailto:sales@superreel.com)

# Superreel® - Industrial Reel

## DIMENSIONS

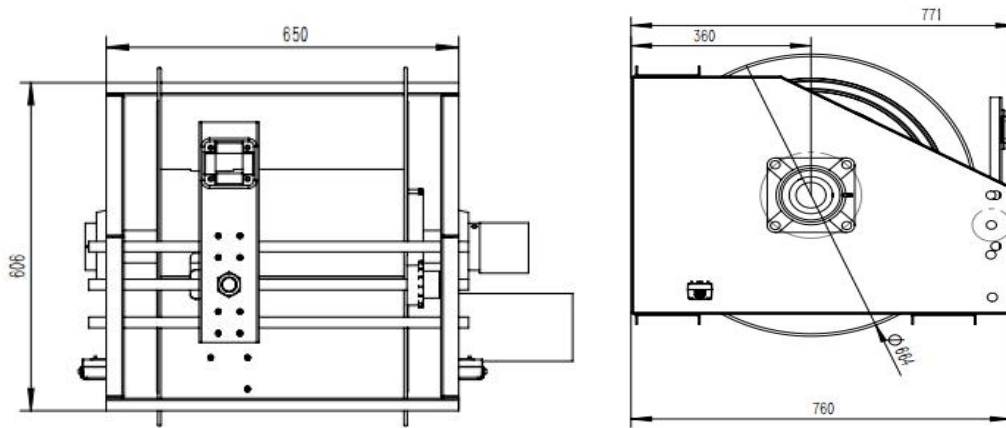

P/N	Port&core number	HOSE-ID. or CABLE-square	Pressure or lmax	Working length	Reel inlet	Hose outlet	A	B	C	D	E	F	G	H	I	J	K
AHSH680D0106200080	1	3/4"	20Mpa	80m	BSPT1-1/4".M	BSPT1-1/4".M	664	286	664	831	760	650	553	621	450	4	14
AHSH680D0107200060	1	1"	20Mpa	60m	BSPT1-1/2".M	BSPT1-1/2".M	664	286	664	831	760	650	553	621	450	4	14
							Dimensions are in millimeters										

